

431 PAN/TILT HEAD

The 431 pan/tilt head supports camera and lens packages up to 15kg (33lbs) and is designed to give high performance in situations where the pan and tilt head should be as unobtrusive as possible.



Agile performance and precise repeatability are combined with the ability to perform slow, smooth, movements during on-air conditions. The head has been installed in many parliaments, legislatures and television studios around the world.


To simplify system installation the 431 head contains an internal control unit which is mounted on the inside of the head cover for easy access. This interfaces to the control panel through the power supply and controls shot storage, movement profiling and power for movements of pan, tilt, zoom and focus.

The head can be mounted on to standard tripods or can be inverted for wall or ceiling mounting.

Key Features

- 15kg (33lb) payload
- Compact size
- Simple system configuration
- Agile performance and precise repeatability
- Ceiling, wall or tripod mounting
- Unobtrusive operation
- Low noise during movement
- Can be controlled by the Vinten Radamec Control System

DRIVING THE FUTURE

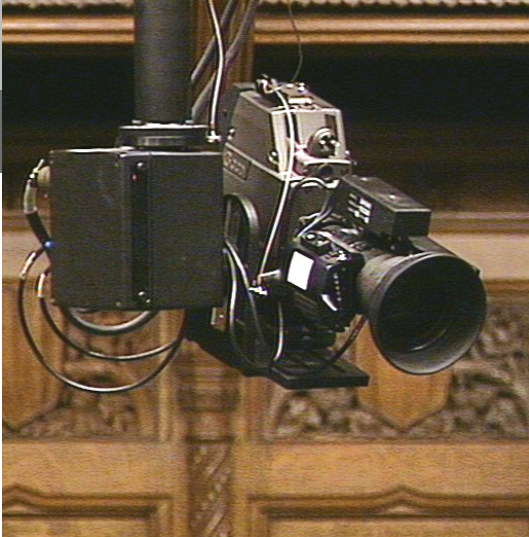

431

PAN/TILT HEAD

Technical Specification

Head dimensions:	
Height	195mm / 7.69"
Width	160mm / 6.29"
Length	170mm / 6.69"
Weight	6kg / 13.2 lbs
Maximum Payload	15kg / 33 lbs
Pan Range	355°
Maximum Speed – Pan/Tilt	configurable up to 60°/Sec
Minimum Speed – Pan/Tilt	0.1° /second
Repeatability	3 mins of arc
Fixing Details	4 x M6 equally spaced on 84mm diameter 4 x M6 equally spaced on 3.3" diameter
Tripod Adaptor Available	
Power Requirement	+24 / 0 / -24 Volts DC / 200 Watts (from PSU)
Memory Capacity	600 shots / 99 Link sequences
Communications	4 ports, RS422 via PSU
Control Input	32 pin connector, power and data signals
Lens Control Outputs	2 x 10 pin connectors to RBS zoom and focus drives or the digital lens drive

Specifications and features subject to change without notice

DRIVING THE FUTURE

info@vintenradamec.com

www.vintenradamec.com

CHINA
The Vitec Group plc China
Room 1806, Hua Bin Building,
No. 8 Yong An Dong Li,
Jian Guo Men Wai Ave,
Chao Yang District,
Beijing, P.R.China 100022
t +86 10 8528 8748
f +86 10 8528 8749

GERMANY
Camera Dynamics GmbH
Gebäude 16
Planiger Straße 34
55543 Bad Kreuznach
Germany
t +49 89 / 321 58 30
f +49 89 / 321 58 50

JAPAN
Vinten Japan KK
P.A. Bldg. 5F
3-12-6 Aobadai
Meguro-ku Tokyo 153-0042
Japan
t +81 3 5456 4155
f +81 3 5456 4156

UK
Camera Dynamics Ltd
Western Way,
Bury St Edmunds,
Suffolk IP33 3TB, UK
t +44 1284 752 121
f +44 1284 750 560
Sales Fax +44 1284 757 929

FRANCE
Camera Dynamics sarl
171, Avenue des Grésillons
92635 GENNEVILLIERS Cedex
France
t +33 820 821 336
f +33 825 826 181

GERMANY
Camera Dynamics GmbH
Erfurter Straße 16
85386 Eching
Germany
t +49 89 / 321 58 200
f +49 89 / 321 58 227

SINGAPORE
Camera Dynamics Pte Ltd
6 New Industrial Road,
#02-02 Hoe Huat Industrial
Building, Singapore 536199
t +65 6297 5776
f +65 6297 5778

USA
Camera Dynamics Inc.
709 Executive Blvd,
Valley Cottage, NY 10989, USA
t +1 845 268 0100
f +1 845 268 0113
Toll Free Sales 1 888 2 Vinten

Vinten / **RADAMEC**
BROADCAST ROBOTICS

Robotic Camera Control Systems